

GPIO_LED_Button_1

for KIT_AURIX_TC334_LK

LED controlled via a push button

AURIX™ TC3xx Microcontroller Training
V1.0.0



[Please read the Important Notice and Warnings at the end of this document](#)

Scope of work

An LED is controlled via a push button.


Upon pressure of a push button, an LED is turned on and the LED is turned off when releasing the button. One port pin is configured as input for checking the push button state and the other port pin is configured as output to control the LED.

Introduction

- › The port pins of AURIX™ can individually be configured either as input or as output
- › When configured as input, the port pin has high impedance. Alternatively, an internal weak pull-up resistor or pull-down resistor can be selected
- › As output the port pin can be configured in push-pull output state or open-drain state
- › The state of a port pin can always be read back, independent whether a port pin is configured as input or output

Hardware setup

This code example has been developed for the board KIT_A2G_TC334_LITE.

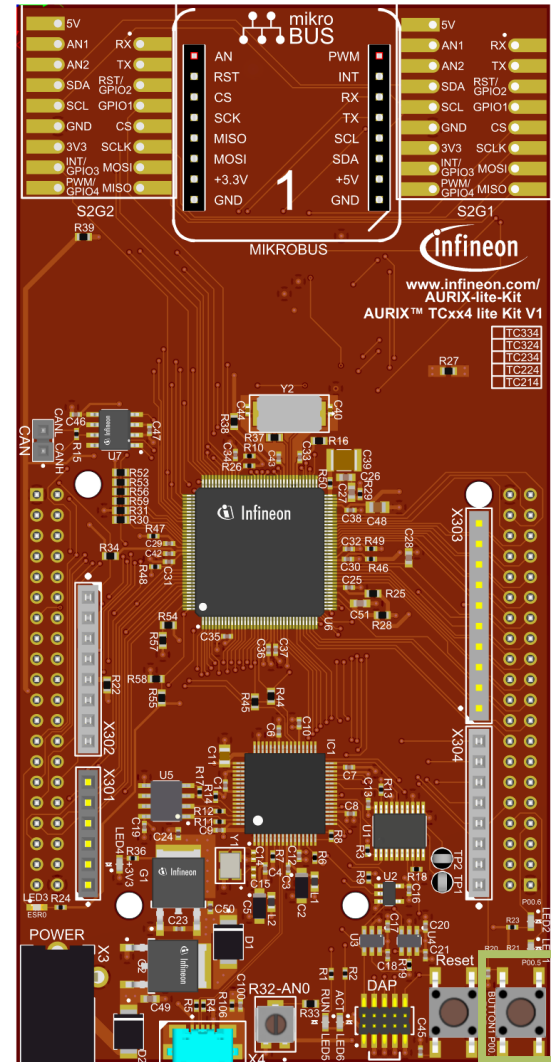

Implementation

Configuring the port pins:

The function *init_GPIOs()* configures one port pin to control an LED and one port pin to check the button's state.

- › The port pin with the connected LED is configured to push-pull output by calling the function *IfxPort_setPinMode()* with the function parameter *IfxPort_Mode_outputPushPullGeneral* (enumerated type value)
- › The port pin connected to the push button is set to input direction with an internal weak pull-up by calling *IfxPort_setPinMode()* with the function parameter *IfxPort_Mode_inputPullUp*

All functions above are provided by the iLLD header *IfxPort.h*.

Implementation

Controlling the LED:

The function ***control_LED()*** reads the state of the push button and, depending on the push button's state, an LED is turned on or off:


- › The port pin state is read by calling the function ***IfxPort_getPinState()***
- › The port pin with the connected LED is set to low or high by using the function ***IfxPort_setPinState()***

All functions are provided by the iLLD header ***IfxPort.h***.

Run and Test

After code compilation and flashing the device, you can observe the following behavior:

- › While the button is pressed, the LED (1) stays on

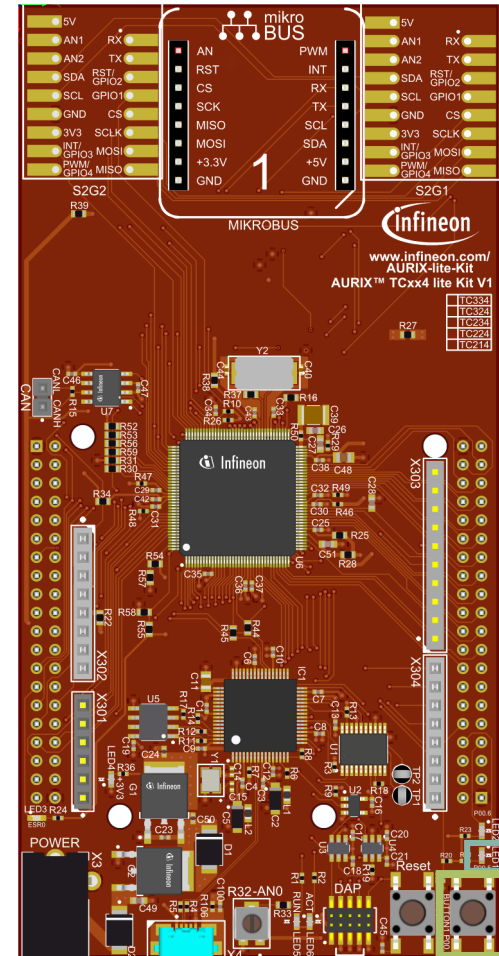

1

References



- › AURIX™ Development Studio is available online:
- › <https://www.infineon.com/aurixdevelopmentstudio>
- › Use the „*Import...*“ function to get access to more code examples.



- › More code examples can be found on the GIT repository:
- › https://github.com/Infineon/AURIX_code_examples



- › For additional trainings, visit our webpage:
- › <https://www.infineon.com/aurix-expert-training>



- › For questions and support, use the AURIX™ Forum:
- › <https://www.infineonforums.com/forums/13-Aurix-Forum>

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2021-12

Published by

Infineon Technologies AG
81726 Munich, Germany

© 2021 Infineon Technologies AG.
All Rights Reserved.

Do you have a question about this document?

Email: erratum@infineon.com

Document reference

GPIO_LED_Button_1_KIT_TC334_LK

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics (“Beschaffenheitsgarantie”).

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer’s compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer’s products and any use of the product of Infineon Technologies in customer’s applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer’s technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (www.infineon.com).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies’ products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.